


Digital indicators

S_Dial ONE

DESCRIPTION

- Strong construction
- Water and coolant resistant, protection rating IP67 according to IEC 60529, with and without connector
- Battery life: 3'300 hours

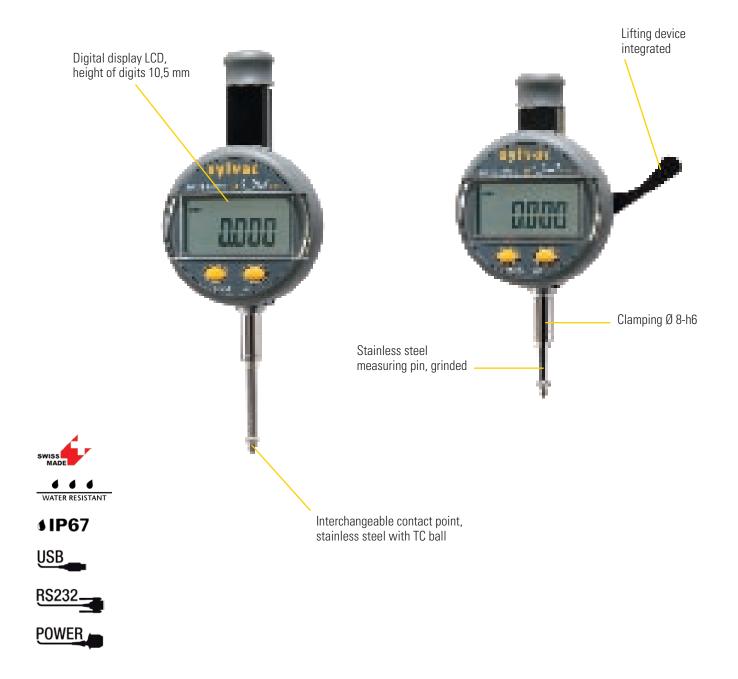




Digital indicators

S_Dial ONE

DIMENSIONAL DRAWINGS

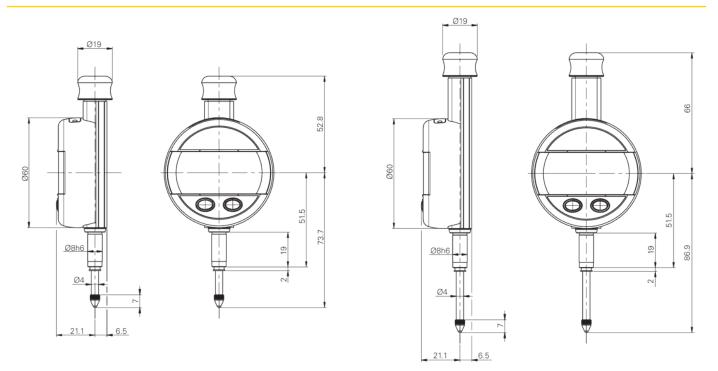

TECHNICAL SPECIFICATIONS

	4	005 0404	005 0404	005 04 44	
		905.0121	905.0131	905.0141	905.0151
Measuring range	mm	12.5	12.5	25	25
Resolution	mm	0.01	0.001	0.01	0.001
Max. Error fe	μm	101)	7	101)	8
Repeatability	μm	2	2	2	2
S_Connect : Power		USB / RS232 / Digimatic / Wireless			
Programmable by PC			•		
Zero setting			•		
Preset			•		
Selection of measuring direction					
) ± 1 digit					

$^{1)} \pm 1$ digit

BASIC INSTRUMENT

- Instrument according to technical specifications
- Lithium battery CR2302 included
- Manual
- Calibration certificate for instruments with resolution of 0.001 mm