


## 799 & 1251 SERIES - LONG RANGE CALIPERS

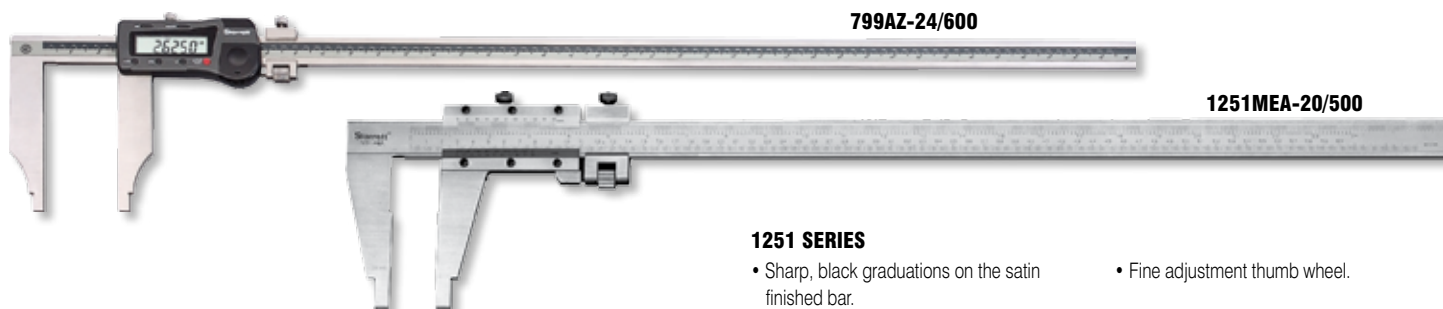

### 799 SERIES

- Instant inch/mm conversion.
- Zero the reading at any position.
- LCD characters are 13mm (1/2") high.
- Fine adjustment thumb wheel.

Cat No	Range	Graduation
799AZ-24/600	600mm / 24"	0.01mm / 0.0005"
799AZ-40/1000	1000mm / 40"	

799AZ-24/600

1251MEA-20/500

### 1251 SERIES

- Sharp, black graduations on the satin finished bar.
- Fine adjustment thumb wheel.

Cat No	Range	Graduation
1251MEA-12/300	300mm / 12"	0.02mm / 0.001"
1251MEA-20/500	500mm / 20"	
1251MEA-24/600	600mm / 24"	
1251MEA-40/1000	1000mm / 40"	

## 3753 SERIES - ELECTRONIC DIGITAL DEPTH GAUGES & ACCESSORIES



3753A-6/150

- Hardened stainless steel body and slide for long life.
- Hook attachment is furnished with the gauge, making it possible to take readings from the edge of the workpiece to edges of slots, grooves, shoulders and other ID length dimensioning.
- Fine adjustment thumb wheel.
- Sharp, easy to read LCD display.
- Instant inch/mm conversion.

Cat No	Range	Graduation / Description
3753AZ-6/150	150mm / 6"	0.01mm / 0.0005"
3753AZ-8/200	200mm / 8"	
3753AZ-12/300	300mm / 12"	
3648-180	180mm	Base Extension With Screws
3648-260	260mm	Base Extension With Screws
3648-320	320mm	Base Extension With Screws

## ELECTRONIC DIGITAL HEIGHT GAUGES



3752-12/300

3751AZ-6/150

### Starrett 3752 Electronic Height Gauge.

- Clear bar graduations in 5mm increments.
- Instant inch/mm conversion.
- Large LCD display.
- "Hold" control feature retains a reading at any position.
- Ability to retain and return to the true zero reading of the height gauge.
- With RS232 data output.

### Starrett 3751 Electronic Height Gauge.

- Instant inch/mm conversion.
- Zero the reading at any position.
- Lock to hold slide in position.
- Vertical bar is back from the edge of the nose to provide better stability.
- Manual ON/OFF plus a built in automatic OFF after 5 minutes of non use.
- Without data output.

Cat No	Range	Graduation
3751AZ-6/150	150mm / 6"	0.01mm / 0.0005"
3752-12/300	300mm / 12"	
3752-24/600	600mm / 24"	